



BROCHADO ROTATORIO · CABEZALES ROTARY BROACHING HEADS



MORSE DIN 228

+ Características generales


- Utilizable tanto en tornos como en centros de mecanizado y/o taladros
- Minimiza el esfuerzo de brochado gracias al sistema oscilatorio
- Rodamientos de alta gama que garantizan una larga vida de la herramienta
- Cuerpo estanco para evitar que las virutas penetren en la zona de los rodamientos
- Regulación de la posición del punzón mediante un tope regulable situado en el fondo del alojamiento del portabrochas
- Posibilidad de montar un portamatriz frontal para la realización de brochados externos

+ Features


- Usable in all types of lathes, machining centers, milling machines or drilling machines
- Minimizes broach load thanks to the pendular system
- High quality bearings to ensure a long tool life
- Tight body to prevent chips from entering the bearing area
- Adjustment of the position of the broach by an adjustable stop located at the bottom of the broachholder
- Possibility to fit a frontal die-holder for external broaching




> POLIPROFILE 2



> POLIPROFILE 3



> POLIPROFILE 4

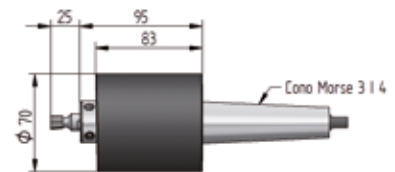

Herramienta | Tool

Código Code	Referencia Reference	Capacidad Capacity	Punzón Broach	Mango	Kg
06010201	POLIPROFILE2+M1	■ <8 ● <10 mm	POL2-XX	MORSE 1	0,9
06010202	POLIPROFILE2+M2	■ <8 ● <10 mm	POL2-XX	MORSE 2	1
06010301	POLIPROFILE3+M2	■ <10 ● <14 mm	POL3-XX	MORSE 2	1,4
06010302	POLIPROFILE3+M3	■ <10 ● <14 mm	POL3-XX	MORSE 3	1,6
06010401	POLIPROFILE4+M3	■ <16 ● <24 mm	POL4-XX	MORSE 3	2,1
06010402	POLIPROFILE4+M4	■ <16 ● <24 mm	POL4-XX	MORSE 4	2,4

Portamatriz para brochado externo Die holder for external broaching

Código Code	Referencia Reference
06060200	POL2-PTM
06060300	POL3-PTM
06060400	POL4-PTM

