

THE NEW VALUE FRONTIER



High Performance Milling | **MEV**

High Performance Milling

MEV

NEW



New Generation of High Performance, Economical, Multi-functional Milling Cutters

Newly Developed Triangle Inserts Provide Numerous Solutions to Machining Challenges

High Performance - Low cutting forces and Higher Rigidity for Excellent Chatter Resistance

Economical - Longer Insert and Holder Tool Life

Multi-functional - Can be Used in Shouldering, Slotting, and Ramping Applications

End Mills, Face Mills, and Modular Heads Available



New Triangular
Insert Design



MEV


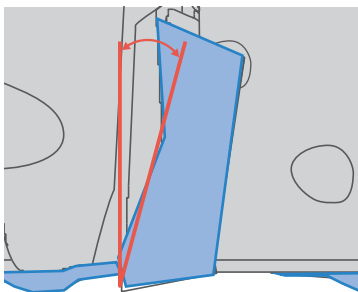
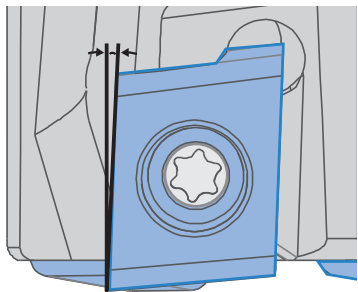

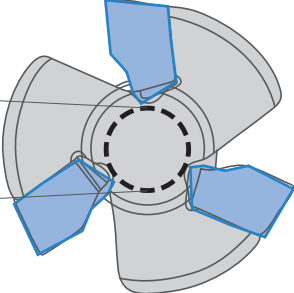
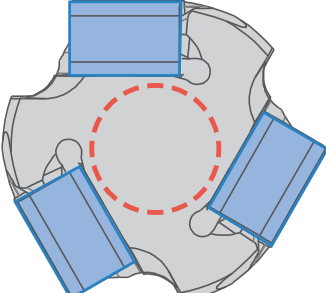
Newly Developed Triangular Inserts for Provide Low Cutting Forces and Increased Rigidity
High Performance, Economical, and Multi-functional Milling Solutions

1 High Performance: Low Cutting Force and High Rigidity


Newly developed vertical triangle inserts with 3 cutting edges

Achieve stable machining with reduced chattering

MEV vs Competitor

	MEV (New vertical triangle inserts) NEW	Conventional End Mill (Positive inserts)	Conventional End Mill (Vertical inserts)
Cutting Force	<p>A.R. : Large</p>  <p>A.R. Max. 17°</p> <p>Low Cutting Force</p>	<p>A.R. : Large</p>  <p>Low Cutting Force</p>	<p>A.R. : Small</p> 
Toolholder's Rigidity	<p>Optimal Web Thickness : Large</p>  <p>about 120% Optimal Web Thickness</p> <p>High Rigidity</p>	<p>Optimal Web Thickness : Small</p> 	<p>Optimal Web Thickness : Large</p>  <p>High Rigidity</p>
	<p>Cutting Force : Low Toolholder's Rigidity : High</p>	<p>Cutting Force : Low Toolholder's Rigidity : Low</p>	<p>Cutting Force : High Toolholder's Rigidity : High</p>

High Performance



Multi-functional


Economical

The MEV's large A.R. produces lower cutting forces and the vertical triangle inserts provide a higher rigidity.

The great performance of the multi-purpose MEV triangle inserts combines both advantages of conventional positive and negative type inserts.


Low cutting force and
tough cutting edge

High rigidity web thickness

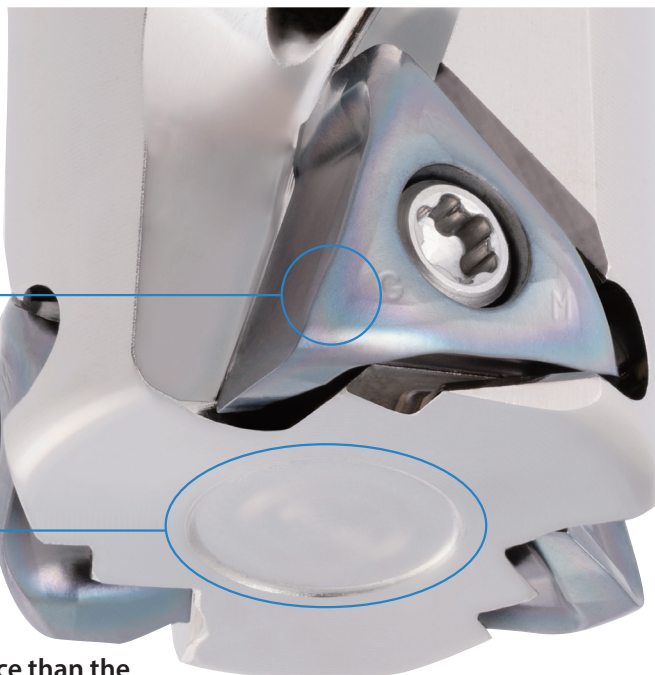

Keeping A.R. max. at 17°, provides lower cutting force than the positive insert types of competitors

Cutting Force Comparison (Internal evaluation)


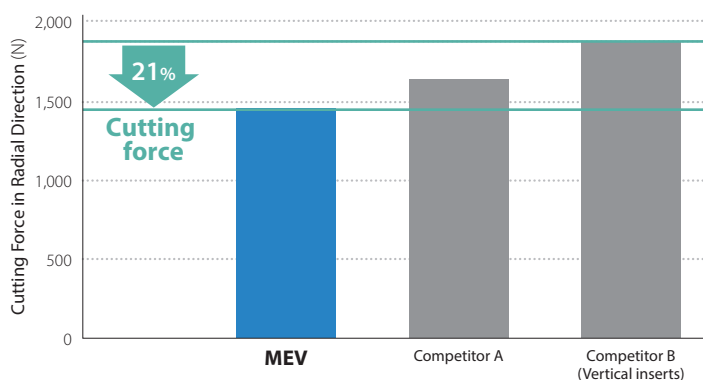


Cutting conditions : $V_c = 200$ m/min, $a_p \times a_e = 3 \times 18$ mm, $f_z = 0.10$ mm/t, $\phi 20$ (3 inserts), Dry Workpiece : SCM440 (H)

Low cutting force and large optimal web thickness provides excellent chattering resistance

Chattering Resistance Comparison (Internal evaluation)

Shouldering

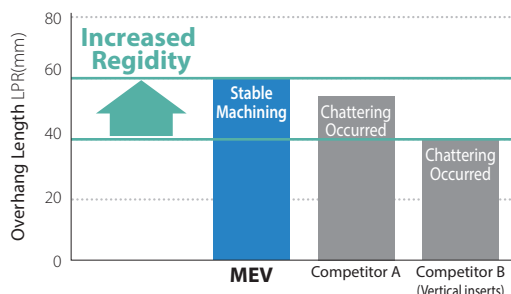

Cutting conditions : $V_c = 200$ m/min, $a_p \times a_e = 3 \times 18$ mm, $f_z = 0.10$ mm/t, $\phi 20$ (3 inserts), Dry Workpiece : SCM440 (H)

Slotting


MEV



Competitor A



Competitor B (Vertical triangle inserts)



Cutting conditions : $V_c = 220$ m/min, $a_p = 3$ mm (Slotting), $f_z = 0.10$ mm/t, $\phi 20$ (3 inserts), Dry Workpiece : SCM440 (H)


Provides excellent surface finish and superior cutting accuracy of the wall

Surface Finish Comparison (Internal evaluation)



Cutting conditions : $V_c = 180$ m/min, $a_p \times a_e = 3 \times 40$ mm, $f_z = 0.1$ mm/t, $\phi 50$ (5 inserts), Dry Workpiece : S50C

Cutting accuracy of wall example (Internal evaluation)

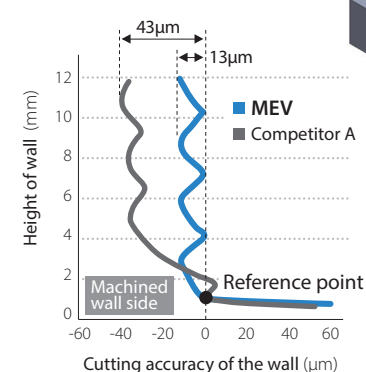

Cutting conditions : $V_c = 200$ m/min, $a_p \times a_e = 3 \times 10$ mm (4 pass), $f_z = 0.15$ mm/t, $\phi 50$ (5 inserts), Dry Workpiece : S50C

*Accuracy of the wall surface varies depending on cutting conditions, machining environment, and insert combination.


2

The Economical Choice: Lengthened Insert Life with 3 Usable Cutting Edges


Insert

Unique triangle inserts with 3 cutting edges


PR15 series utilizes excellent MEGACOAT NANO coating technology with wear and adhesion resistance



Coating Properties (Abrasion resistance)

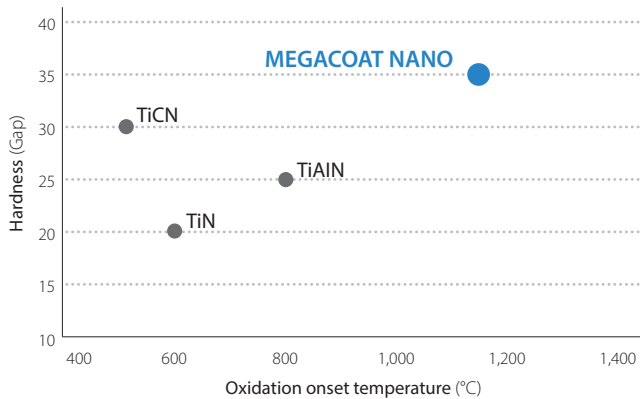

Coating Properties (Adhesion resistance)

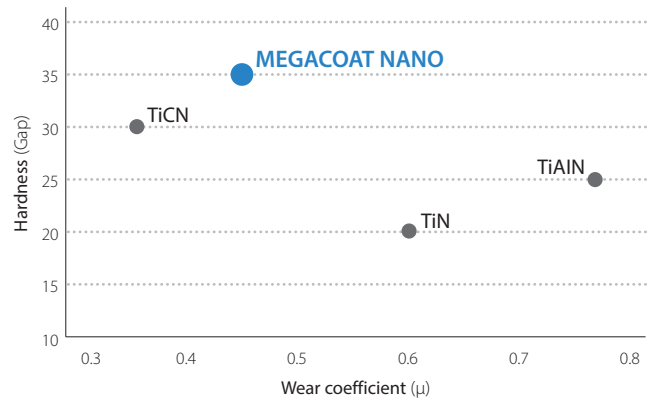

Achieve long tool life with the combination of a tough substrate and a special Nano coating layer

Stable Machining with Excellent Wear Resistance

Toolholder


Engineered with state-of-the-art simulation and analysis technology, the MEV is built to reduce cutting stress on the cutter body
Increased hardness and wide contact surface for improved durability

Increased hardness than competitor




Wide mounting surface

Simulation and analysis (image)



Prevents breakage from toolholder with decreased max. cutting stress


Toolholder Durability Comparison (Internal evaluation)

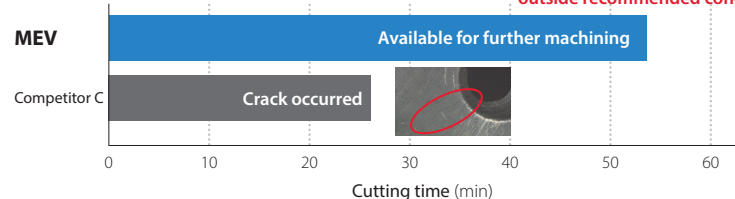

*Comparison at high feed rate outside recommended conditions

Cutting conditions : $V_c = 120$ m/min, $a_p \times a_e = 5 \times 7.5$ mm, $f_z = 0.25$ mm/t, $\phi 20$ (1 insert), Dry Workpiece : SCM440 (H)

High Performance



Multi-functional


Economical

3 cutting edges combined with PR15 series MEGACOAT NANO coating technology maintains long tool life

Improved toolholder toughness and durability


Long Tool Life with Excellent Wear Resistance

Wear Resistance Comparison (Internal evaluation)

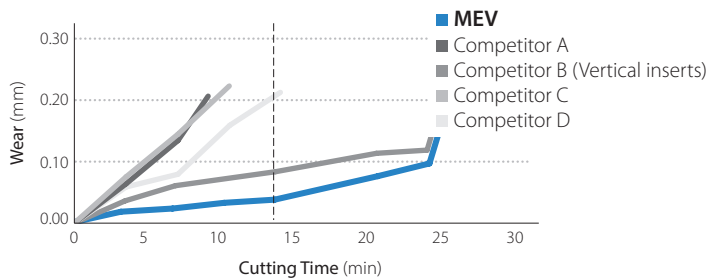


Cutting conditions : $V_c = 180$ m/min, $a_p \times a_e = 3 \times 10$ mm, $f_z = 0.1$ mm/t, $\phi 20$, Dry Workpiece : SKD11 (30~35HS)


Cutting Edge (After machining 14 min)

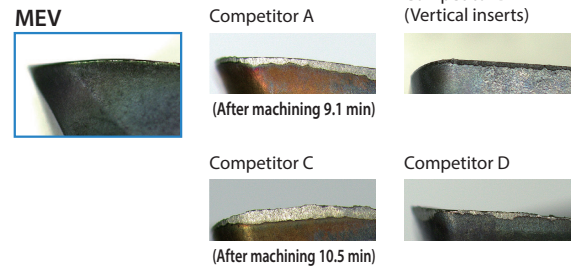


Improved Stability with Superior Fracture Resistance



Cutting edge cross-section

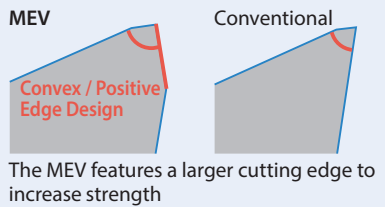

Wear Resistance Comparison (Internal evaluation)

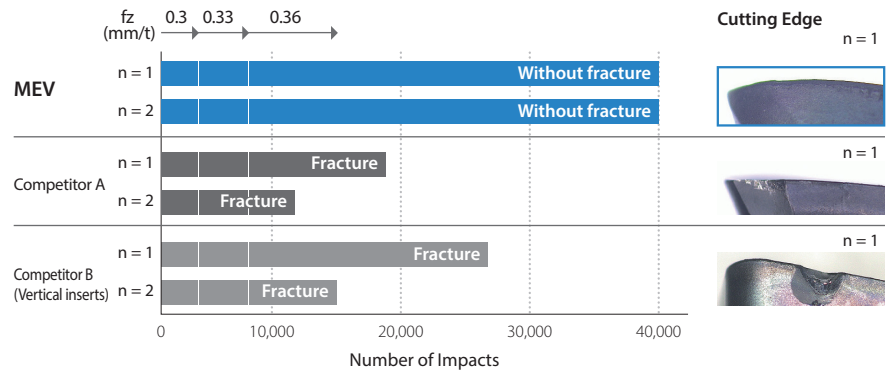

Cutting conditions : $V_c = 120$ m/min, $a_p \times a_e = 2 \times 10$ mm, $f_z = 0.3 - 0.36$ mm/t, $\phi 20$ (1 insert), Dry Workpiece : SCM440 (H) (37~39HS)

3


Multi-functional: The MEV can perform a wide variety of machining processes

Great performance in shouldering, slotting, and ramping applications (D.O.C. 6 mm or less)


Chip Example (Slotting)



Cutting conditions : $V_c = 150$ m/min, $a_p = 6$ mm (Slotting), $f_z = 0.2$ mm/t, $\phi 20$ (3 insert), Dry Workpiece : SS400

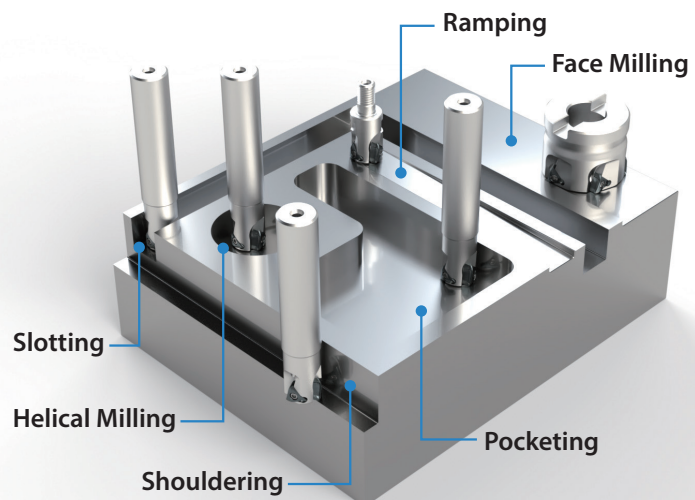

High Performance




Multi-functional

Economical

Good chip evacuation with a unique insert chipbreaker design

Stable machining in applications like slotting and ramping where chip recutting issues are common


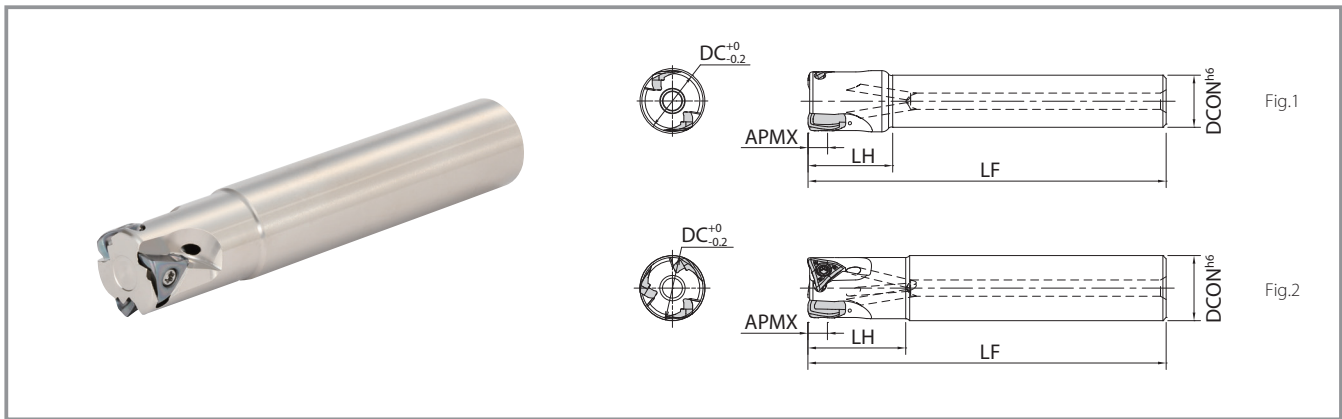






Toolholder Dimensions

Description			Stock	No. of Inserts	Dimensions (mm)					Rake Angle		Coolant Hole	Weight (kg)	Insert	Max. Revolution (min ⁻¹)							
					DC	DCON	LF	LH	APMX	A.R.(MAX.)	R.R.											
Straight Shank	Standard (Straight)	MEV	20-S16-06-2T	●	2	20	16	110	26	6	+17°	Yes	-38°	0.2	Fig.1	32,000						
			22-S20-06-3T	●	3	22	20									120	29	-37°	0.3	29,000		
			25-S20-06-3T	●		25		-36°	0.4											25,000		
			28-S25-06-3T	●		28														130	32	-36°
			30-S25-06-4T	●	4	30	40									150	50	-36°	1.0			
			32-S25-06-4T	●		32		120	40													
			40-S32-06-5T	●	5	40	32									+16°	-36°	1.0	16,000			
			50-S32-06-5T	●		50		32	120											40	0.9	13,000
	Same Size Shank	MEV	20-S20-06-2T	●	2	20	20	110	30	6	+17°	Yes	-38°	0.2	Fig.2	32,000						
			20-S20-06-3T	●	3											25	25	120	32	-37°	0.4	25,000
			25-S25-06-2T	●	3	32	32	130	40													-36°
			25-S25-06-3T	●												4	32	32	130	40	-36°	
			32-S32-06-3T	●	4	32	32	130	40													-36°
	32-S32-06-4T	●	32	32						130	40	0.7	20,000									
	Long Shank	MEV	20-S18-06-150-2T	●	2	20	18	150	30	6	+17°	Yes	-38°	0.3	Fig.1	32,000						
			20-S20-06-150-2T	●			20								40		-37°	0.6	Fig.2	25,000		
			25-S25-06-170-2T	●		25	25	170	50							-36°					1.1	20,000
32-S32-06-200-2T			●	32		32	200	65	1.1						20,000							

● : Standard Item


Spare Parts and Applicable Inserts

Description		Parts				Applicable Inserts	
		Clamp Screw	Wrench	Anti-Seize Compound	Arbor Bolt		
						General Purpose	Low Cutting Force
End Mills	MEV ...-06-...T	SB-3076TRP	DTPM-10	P-37	-	TOMT06...-GM	TOMT06...-SM
Face Mills	MEV 032R-06-4T-M				HH8X25		
	040R-06-5T-M				HH10X30		
	050R-06-5T-M				-		
Modular Heads	MEV 20-M10-06-2T				-		
	20-M10-06-3T				-		
	25-M12-06-3T				-		
	32-M16-06-4T				-		

Caution with Max. Revolution

When running an end mill or a cutter at the maximum revolution, the insert or the cutter may be damaged by centrifugal force.
Coat anti-seize compound thinly on portion of taper and thread prior to installation.

MEV (Face Mills)

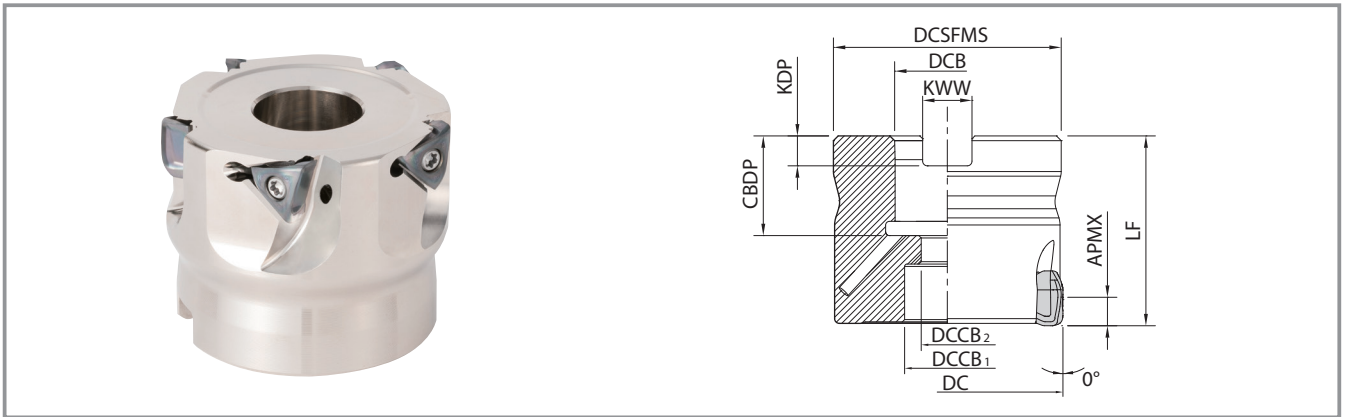


Toolholder Dimensions

Description		Stock	No. of Inserts	Dimensions (mm)									Rake Angle		Coolant Hole	Weight (kg)	Max. Revolution (min ⁻¹)	
				DC	DCSfMS	DCB	DCCB ₁	DCCB ₂	LF	CBDP	KDP	KWW	APMX	A.R. (MAX.)				R.R.
MEV	032R-06-4T-M	●	4	32	30	16	13.5	9	35	19	5.6	8.4	6	+17°	-36°	Yes	0.1	20,000
	040R-06-5T-M	●	5	40	38		15	40						21			6.3	10.4
	050R-06-5T-M	●	5	50	48	22	18	11									0.4	13,000

● : Standard Item

MEV (Modular Heads)

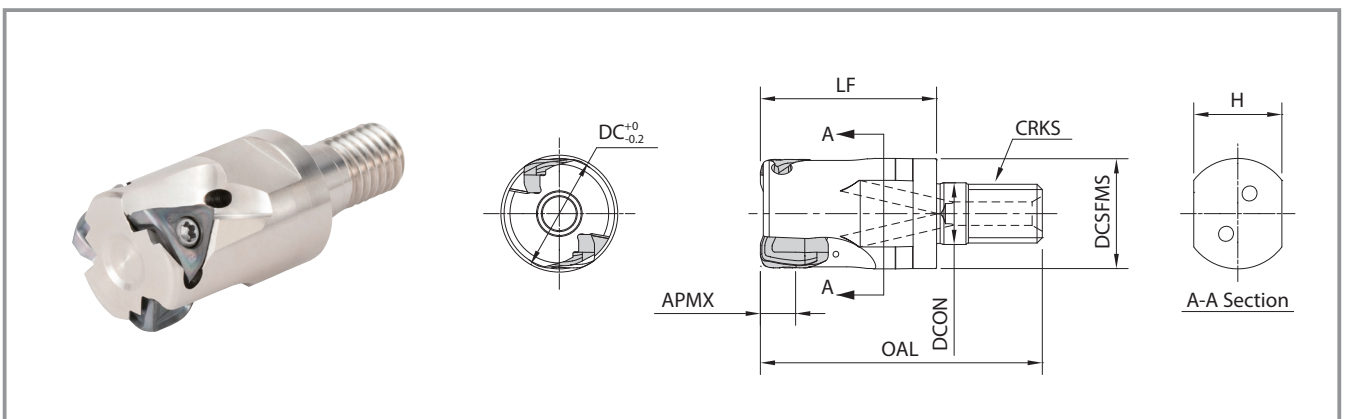


Toolholder Dimensions

Description	Stock	No. of Inserts	Dimensions (mm)								Rake Angle		Coolant Hole	Max. Revolution (min ⁻¹)
			DC	DCSFMS	DCON	OAL	LF	CRKS	H	APMX	A.R. (MAX.)	R.R.		
MEV 20-M10-06-2T	●	2	20	18.7	10.5	48	30	M10×P1.5	15	6	+17°	-38°	Yes	32,000
20-M10-06-3T	●	3										-37°		25,000
25-M12-06-3T	●		25	23	12.5	56	35	M12×P1.75	19			-36°		20,000
32-M16-06-4T	●	4	32	30	17	62	40	M16×P2.0	24					

● : Standard Item

BT Arbor for Exchangeable Head / Double-face Clamping Spindle

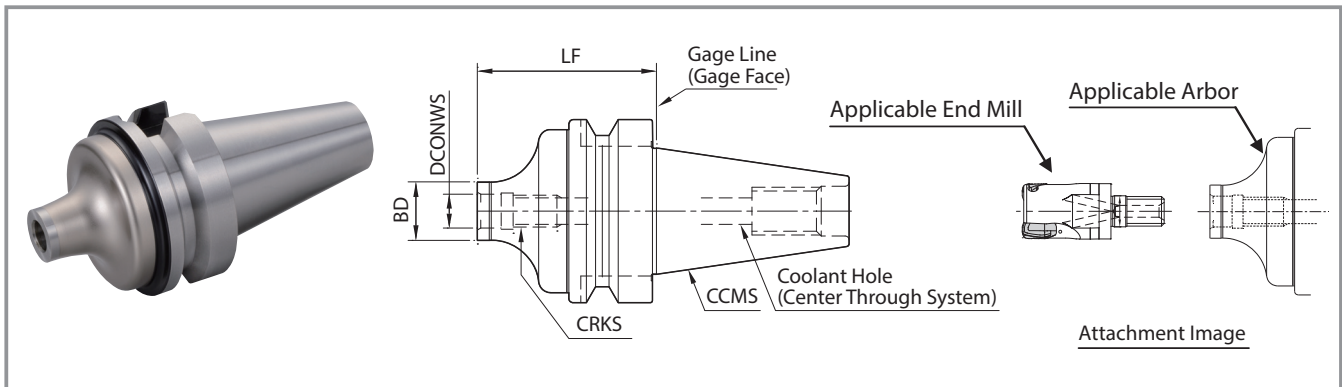

Dimensions

Description	Stock	Dimensions (mm)				Coolant Hole	Arbor (Double-face clamping spindle)	
		LF	BD	DCONWS	CRKS		CCMS	Applicable End Mill
BT30K- M10-45	●	45	18.7	10.5	M10×P1.5	Yes	BT30	MEV20-M10..
	●		23	12.5	M12×P1.75			MEV25-M12..
BT40K- M10-60	●	60	18.7	10.5	M10×P1.5	Yes	BT40	MEV20-M10..
	●	55	23	12.5	M12×P1.75			MEV25-M12..
	●	65	30	17	M16×P2.0			MEV32-M16..

● : Standard Item

Actual End Mill Depth

Arbor Description	Applicable End Mill			Actual End Mill Depth (mm)
	Description	Cutting Dia.	Dimensions	
		DC	LF	
BT30K- M10-45	MEV20-M10..	20	30	36.8
	MEV25-M12..	25	35	42.8
BT40K- M10-60	MEV20-M10..	20	30	38.7
	MEV25-M12..	25	35	44.6
	MEV32-M16..	32	40	51.2

Case study

Parts for machinery SUS420


Vc = 180 m/min
ap × ae = 1 × ~50 mm
fz = 0.1 mm/t Dry
MEV50-S32-06-5T (5 inserts)
TOMT060508ER-GM PR1535

Cutting time

MEV **v_f=575 mm/min**

Competitor E **v_f=350 mm/min**

Quiet machining even when cutting speed increased
The MEV shows 1.6 times machining efficiency and good bottom surface finish
(User evaluation)



Machining Efficiency
x1.6

Plate SS400


Vc = 180 m/min
ap = 3 mm
fz = 0.14 mm/t Dry
MEV22-S20-06-3T (ø22-3 Inserts)
TOMT060508ER-GM PR1525

Number of parts produced

MEV **160 pcs/corner**



Competitor F **65 pcs/corner**

The MEV achieved 2.4 times longer tool life than competitor F.
Quieter machining with excellent surface finish
(User evaluation)



Tool life
x2.4


Applicable Inserts

Insert		Description	Dimensions (mm)					MEGACOAT NANO		CVD Coating
			IC	S	D1	BS	RE	PR1525	PR1535	CA6535
 General Purpose		TOMT 060508ER-GM	7.2	5.7	3.4	1.5	0.8	●	●	●
 Low Cutting Force		TOMT 060508ER-SM	7.2	5.7	3.4	1.5	0.8	●	●	●

● : Standard Item


Recommended Chipbreaker Range

Shouldering

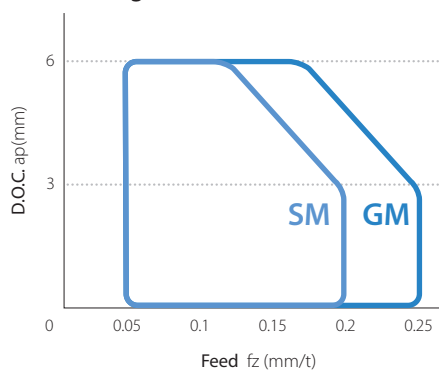

Cutting conditions : Vc = 150 m/min, ae = DC/2 mm, Workpiece : S50C

Slotting

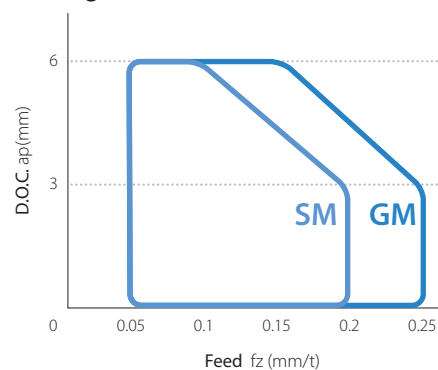

Cutting conditions : Vc = 150 m/min, ae = DC mm, Workpiece : S50C

Recommended Cutting Conditions ★ : 1st Recommendation ☆ : 2nd Recommendation

Chipbreaker	Workpiece	Feed (fz : mm/t)	Recommended Insert Grade (Cutting Speed Vc : m/min)		
			MEGACOAT NANO		CVD Coating
			PR1535	PR1525	CA6535
GM	Carbon Steel	0.08 – 0.15 – 0.25	120 – 180 – 250	120 – 180 – 250	—
	Alloy Steel	0.08 – 0.15 – 0.2	100 – 160 – 220	100 – 160 – 220	—
	Mold Steel	0.08 – 0.12 – 0.2	80 – 140 – 180	80 – 140 – 180	—
	Austenitic Stainless Steel	0.08 – 0.12 – 0.15	100 – 160 – 200	100 – 160 – 200	—
	Martensitic Stainless Steel	0.08 – 0.12 – 0.2	150 – 200 – 250	—	180 – 240 – 300
	Precipitation Hardened Stainless Steel	0.08 – 0.12 – 0.2	90 – 120 – 150	—	—
	Gray Cast Iron	0.08 – 0.18 – 0.25	—	120 – 180 – 250	—
	Nodular Cast Iron	0.08 – 0.15 – 0.2	—	100 – 150 – 200	—
	Ni-base Heat-Resistant Alloy	0.08 – 0.12 – 0.15	20 – 30 – 50	—	20 – 30 – 50
	Titanium Alloy	0.08 – 0.15 – 0.2	40 – 60 – 80	—	—
SM	Carbon Steel	0.08 – 0.15 – 0.2	120 – 180 – 250	120 – 180 – 250	—
	Alloy Steel	0.08 – 0.12 – 0.18	100 – 160 – 220	100 – 160 – 220	—
	Mold Steel	0.08 – 0.1 – 0.15	80 – 140 – 180	80 – 140 – 180	—
	Austenitic Stainless Steel	0.08 – 0.1 – 0.15	100 – 160 – 200	100 – 160 – 200	—
	Martensitic Stainless Steel	0.08 – 0.1 – 0.15	150 – 200 – 250	—	180 – 240 – 300
	Precipitation Hardened Stainless Steel	0.08 – 0.1 – 0.15	90 – 120 – 150	—	—
	Ni-base Heat-Resistant Alloy	0.08 – 0.1 – 0.12	20 – 30 – 50	—	20 – 30 – 50
	Titanium Alloy	0.08 – 0.12 – 0.15	40 – 60 – 80	—	—

The number in **bold font** is recommended starting conditions. Adjust the cutting speed and the feed rate within the above conditions according to the actual machining situation.

Cutting with coolant is recommended for Ni-base Heat Resistant Alloy and Titanium Alloy.

Cutting with coolant is recommended for finishing.



Ramping Reference Data

Description	Cutter Dia. DC (mm)	20	22	25	28	30	32	40	50
MEV... -06- ...	Max. Ramping Angle α max (°)	1.00	0.80	0.65	0.60	0.55	0.50	0.40	0.30
	tan RMPX	0.017	0.014	0.011	0.010	0.010	0.009	0.007	0.005


• Make ramping angle smaller if chips are too long

Ramping Tips

Ramping angle should be under α max (maximum ramping angle) in the above cutting conditions

Reduce recommended feed rate in cutting conditions less than 70%

Formula for Max. Cutting Length (L) at Max. Ramping Angle $L = \frac{ap}{\tan RMPX}$

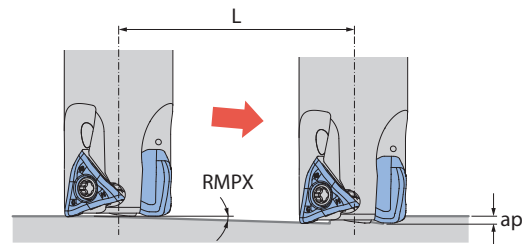


Helical Milling Tips

For helical milling, use between min. drilling dia. and max. drilling dia.


Exceeding max. machining dia.

Center core remains after machining



Under min. machining dia.

Center core hits holder body

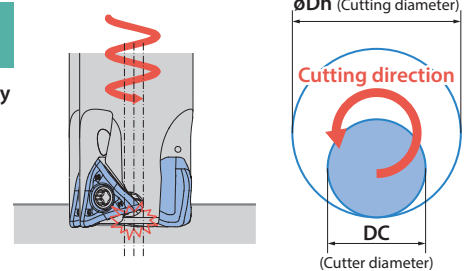

Unit : mm


Description	Min. Cutting Dia.	Max. Cutting Dia.
MEV... -06- ...	$2 \times DC - 5$	$2 \times DC - 2$

For helical milling, use between min. drilling dia. and max. drilling dia.

Keep machine depth (h) per rotation less than max. ap (S) in the cutter dimensions chart

Use caution to eliminate incidences caused by producing long chips

Drilling Tips

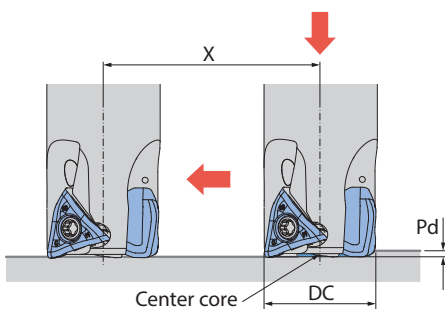


Unit : mm

Description	Max. Drilling Depth Pd	Min. Cutting Length X for Flat Bottom Surface
MEV... -06- ...	0.25	DC-3

It is recommended to reduce feed by 25% of recommendation until the center core is removed when traversing after drilling

Axial feed rate recommendation per revolution is $f < 0.1 \text{ mm/rev}$

Low Cutting Force

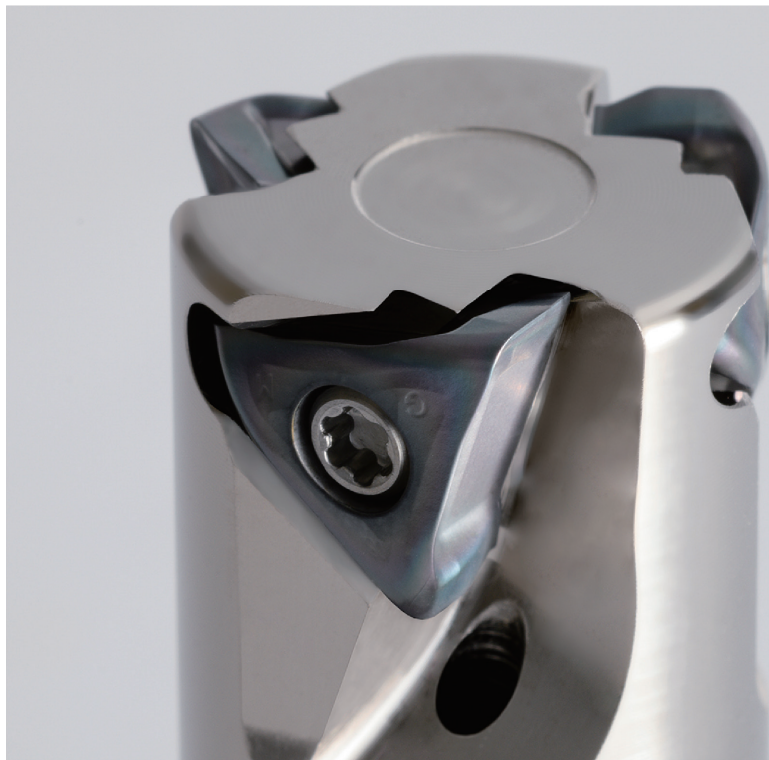

High Rigidity
