



BROCHADO ROTATORIO · CABEZALES ROTARY BROACHING HEADS



VDI DIN 69880

+ Características generales


- Utilizable tanto en tornos como en centros de mecanizado y/o taladros
- Minimiza el esfuerzo de brochado gracias al sistema oscilatorio
- Rodamientos de alta gama que garantizan una larga vida de la herramienta
- Cuerpo estanco para evitar que las virutas penetren en la zona de los rodamientos
- Regulación de la posición del punzón mediante un tope regulable situado en el fondo del alojamiento del portabrochas
- Posibilidad de montar un portamatriz frontal para la realización de brochados externos

+ Features


- Usable in all types of lathes, machining centers, milling machines or drilling machines
- Minimizes broach load thanks to the pendular system
- High quality bearings to ensure a long tool life
- Tight body to prevent chips from entering the bearing area
- Adjustment of the position of the broach by an adjustable stop located at the bottom of the broachholder
- Possibility to fit a frontal die-holder for external broaching




> POLIPROFILE 2



> POLIPROFILE 3



> POLIPROFILE 4

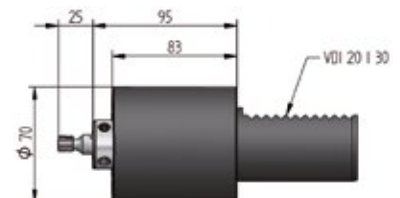

Herramienta | Tool

Código Code	Referencia Reference	Capacidad Capacity	Punzón Broach	Ø D	Kg
06010207	POLIPROFILE2+VDI20	■ <8 ◆ <10 mm	POL2-XX	20 mm	1
06010208	POLIPROFILE2+VDI30	■ <8 ◆ <10 mm	POL2-XX	30 mm	1,2
06010308	POLIPROFILE3+VDI20	■ <10 ◆ <14 mm	POL3-XX	20 mm	1,4
06010309	POLIPROFILE3+VDI30	■ <10 ◆ <14 mm	POL3-XX	30 mm	1,6
06010408	POLIPROFILE4+VDI30	■ <16 ◆ <24 mm	POL4-XX	30 mm	2,5
06010409	POLIPROFILE4+VDI40	■ <16 ◆ <24 mm	POL4-XX	40 mm	2,7

Portamatriz para brochado externo Die holder for external broaching

Código Code	Referencia Reference
06060200	POL2-PTM
06060300	POL3-PTM
06060400	POL4-PTM

